

2026



Led Ekran

Kataloğu

CUSTOMIZED SHAPE

Flexible Led billboards can be customized in any shape according to customer needs, and can be used in various fields and applications.



cylindrical



wave



toroidal

İç Mekan Led Ekran

1.25 Serisi




Item	Parameter	Ordinary Standard Configuration
Module Parameter	Product Mode	IFS-EIA1.2S-C
	Pixel Composition	SMD1010
	Pixel Pitch (mm)	1.25
	Module Resolution (W×H)	256×128=32768
	Module Size (mm)	320×160
	Module Weight (kg)	0.46 ± 0.01kg
	Module Input Voltage (V)	4.2-5.0 (Support 5V)
	The Max Current for Module (A)	≤3
	The Max Power Consumption for Module (W)	≤15
Cabinet Parameter	Module Qty/Cabinet (W×H)	2×3
	Cabinet Resolution (W×H)	512×384
	Cabinet Size (mm)	640×480
	Cabinet Area (m ²)	0.3072
	Cabinet Pixel Density (dots/m ²)	640000
	Cabinet Evenness (mm)	≤0.2
	Maintenance Method	Front or Rear Maintenance

Item	Parameter	Ordinary Standard Configuration
Optical Parameter	Cabinet Material	Die-casting Aluminum
	White Balance Brightness (nits)	350-400 nit
	Visual Angle (H/V)	140 /140
	Brightness / Colorful Evenness	≥95%
	Contrast Ratio	4000:1
Performance Parameter	Frequency (Hz)	≥50/60
	Driving Method	Constant Current, 1/64 Scanning
	Refresh Ratio (Hz)	3840Hz
	Color Processor	12-14 bit
	Lamp Lifespan (hrs)	100,000H
	Work/Humidity temperature (°C/RH)	-10°C 40°C / 10%-65%RH (no condensation)
	Storage Temperature/Humidity (°C/RH)	-10°C 30°C / 10%-60%RH (no condensation)

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

Power Supply Configuration solution

Power Supply	Configuration Project
40A Power Supply	Can load 6pcs modules
60A Power Supply	Can load 8pcs modules

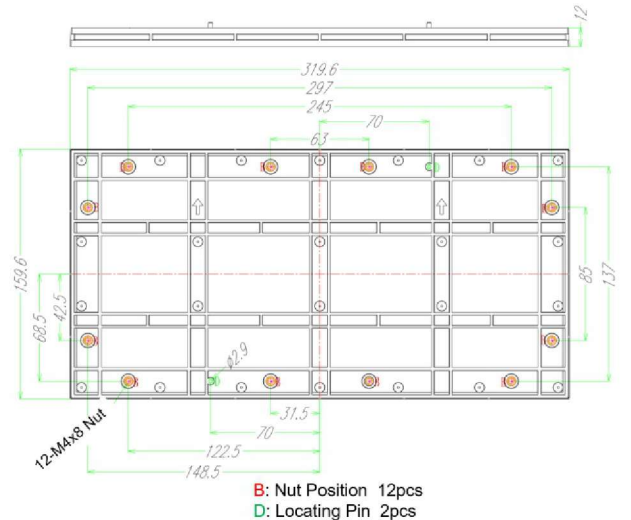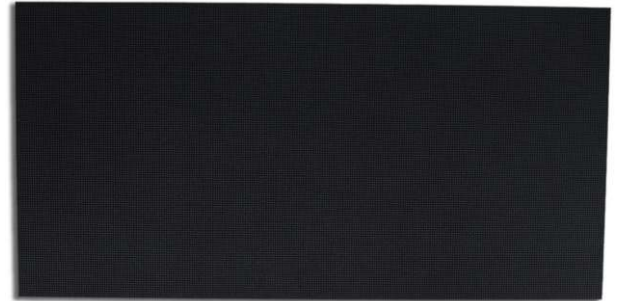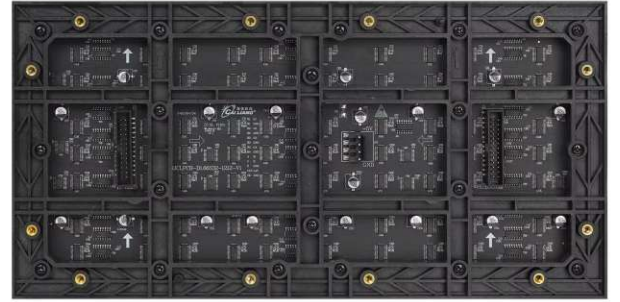

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14






İç Mekan Led Ekran

1.53 Serisi

Item	Parameter	Ordinary Standard Configuration
Module Parameter	Product Mode	IFS-EIA1.5S-C
	Pixel Composition	SMD1212
	Pixel Pitch (mm)	1.538
	Module Resolution (W×H)	208×104=21632
	Module Size (mm)	320×160
	Module Weight (kg)	0.43 ± 0.01kg
	Module Input Voltage (V)	4.2-5.0
	The Max Current for Module (A)	≤3.5
	The Max Power Consumption for Module (W)	≤17.5 (DC 5V)
Cabinet Parameter	Module Qty/Cabinet (W×H)	2×3
	Cabinet Resolution (W×H)	416×312
	Cabinet Size (mm)	640×480×70
	Cabinet Area (m²)	0.3072
	Cabinet Weight (kg)	4.1
	Cabinet Pixel Density (dots/m²)	422500
	Cabinet Evenness (mm)	≤0.2
	Maintenance Method	Rear (Front customized)

Item	Parameter	Ordinary Standard Configuration
Optical Parameter	Cabinet Material	Die-casting Aluminum
	White Balance Brightness (nits)	350-400
	Visual Angle (Horizontal/Vertical)	140 /140
	Brightness / Colorful Evenness	≥97%
	Contrast Ratio	4000:1
Performance Parameter	Frequency (Hz)	≥60
	Driving Method	Constant Current, 1/52 Scanning
	Refresh Ratio (Hz)	3840Hz
	Color Processor	12-14bit
	Lifespan (hrs)	100,000H
	Work/Humidity temperature (°C/RH)	-10°C 40°C / 10%-65%RH (no condensation)
	Storage Temperature/Humidity (°C/RH)	-10°C 30°C / 10%-60%RH (no condensation)

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

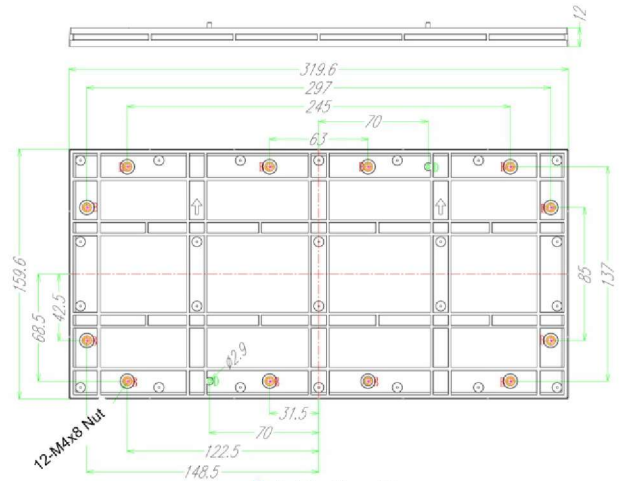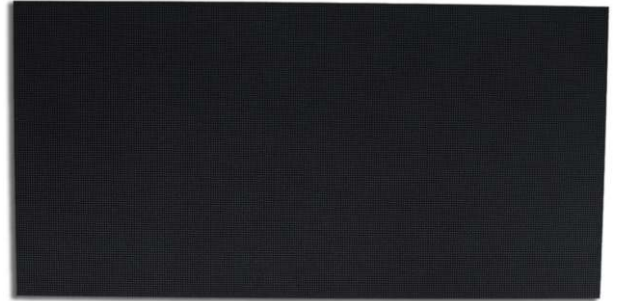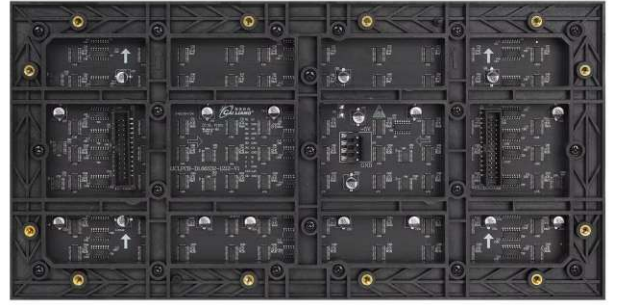

B: Nut Position 12pcs
D: Locating Pin 2pcs

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14



Handle



Network interface



Aviation socket



Power Supply




Cabinet handle



Cabinet corner
protection



Quick lock



Latch



Signal lamp

Excellent product came in all details from cabinet handle. cabinet fixed slot, fast lock, magnet adsorption module, module installation knob Power & signal connector, detachable power boxing, and more




İç Mekan Led Ekran

1.86 Serisi

Item	Parameter	Ordinary Standard Configuration
Module Parameter	Product Mode	IFS-EIA1.8S-C
	Pixel Composition	SMD1515
	Pixel Pitch (mm)	1.86
	Module Resolution (W×H)	172×86=14792
	Module Size (mm)	320×160
	Module Weight (kg)	0.45 ± 0.01kg
	Module Input Voltage (V)	4.2-5.0 (Support 5V)
	The Max Current for Module (A)	≤3.8
	The Max Power Consumption for Module (W)	≤19 (DC 5V)
Cabinet Parameter	Module Qty/Cabinet (W×H)	2×3
	Cabinet Resolution (W×H)	344×258
	Cabinet Size (mm)	640×480
	Cabinet Area (m²)	0.3072
	Cabinet Weight (kg)	4.1
	Cabinet Pixel Density(dots/m²)	288906
	Cabinet Evenness (mm)	≤0.2
	Maintenance Method	Rear (Front customized)

Item	Parameter	Ordinary Standard Configuration
	Cabinet Material	Die-casting Aluminum
Optical Parameter	White Balance Brightness (nits)	400 - 450
	Visual Angle (Horizontal/Vertical)	140 /140
	Brightness / Colorful Evenness	≥95%
	Contrast Ratio	4000:1
Performance Parameter	Frequency (Hz)	≥50/60
	Driving Method	Constant Current, 1/43 Scanning
	Refresh Ratio (Hz)	3840Hz
	Color Processor	12-14bit
	Lifespan (hrs)	100,000H
	Work/Humidity temperature (℃/RH)	-10℃ ~ 40℃ / 10%-65%RH (no condensation)
	Storage Temperature/Humidity (℃/RH)	-10℃ ~ 30℃ / 10%-60%RH (no condensation)

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

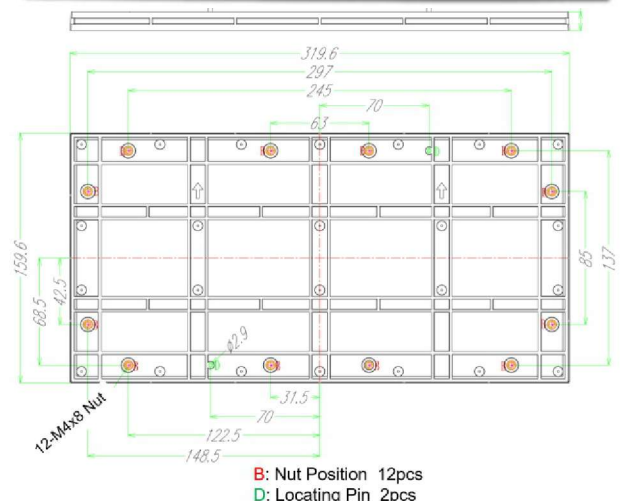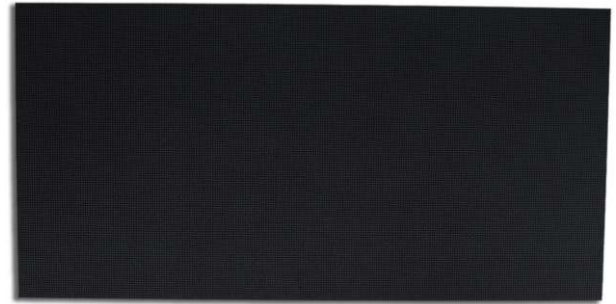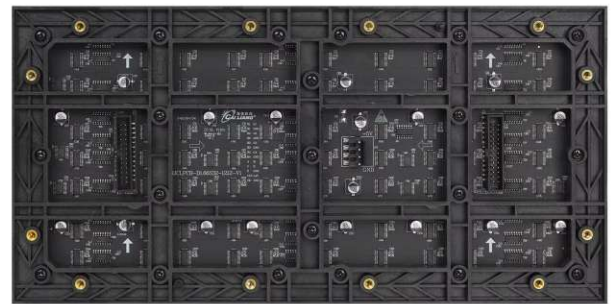

B: Nut Position 12pcs
D: Locating Pin 2pcs

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14





İç Mekan Led Ekran

1.86 Flexiable Serisi

Item	Parameter	Ordinary Standard Configuration
Module Parameter	Product Mode	IFS-FIA1.8S-C
	Pixel Composition	SMD1515
	Pixel Pitch (mm)	1.86
	Module Resolution (W×H)	172×86=14792
	Module Size (mm)	320×160
	Module Weight (kg)	0.2 ± 0.01kg
	Module Input Voltage (V)	4.2-5.0 (Support 5V)
	The Max Current for Module (A)	≤6.5
	The Max Power Consumption for Module (W)	≤32.5 (DC 5V)
Optical Parameter	White Balance Brightness (nits)	550
	Visual Angle (Horizontal/Vertical)	120 /120
	Brightness / Colorful Evenness	≥95%
	Contrast Ratio	3000:1

Item	Parameter	Ordinary Standard Configuration
Performance Parameter	Frequency (Hz)	≥50/60
	Driving Method	Constant Current, 1/43 Scanning
	Refresh Ratio (Hz)	3840Hz
	Color Processor	12-14bit
	Lifespan (hrs)	100,000H
	Work/Humidity temperature (°C/RH)	-10°C 50°C / 10%-90%RH (no condensation)
	Storage Temperature/Humidity (°C/RH)	-10°C 60°C / 10%-90%RH (no condensation)


*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

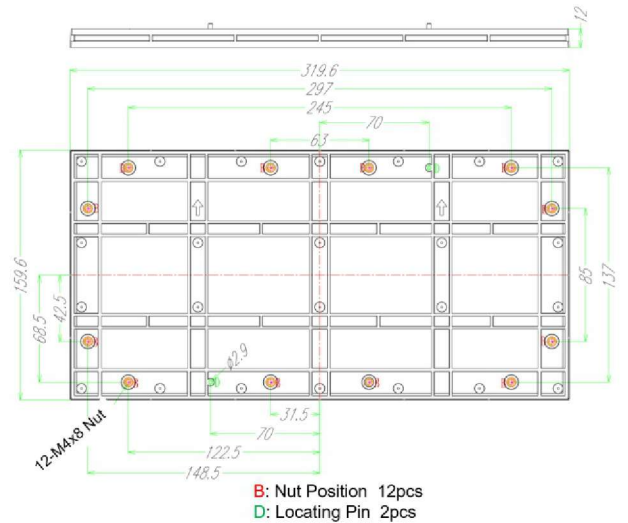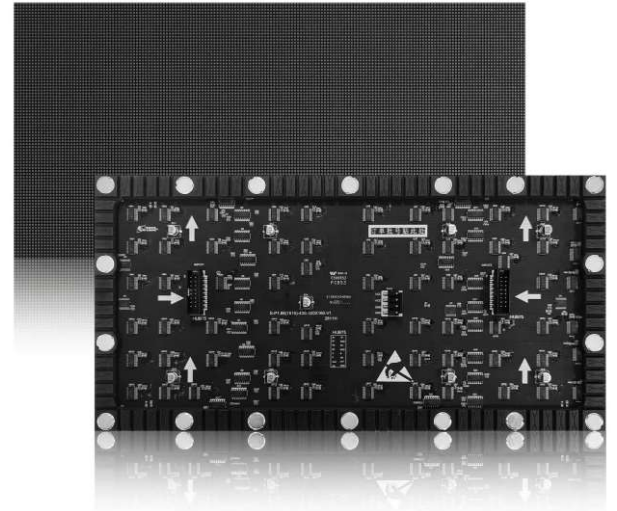

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14

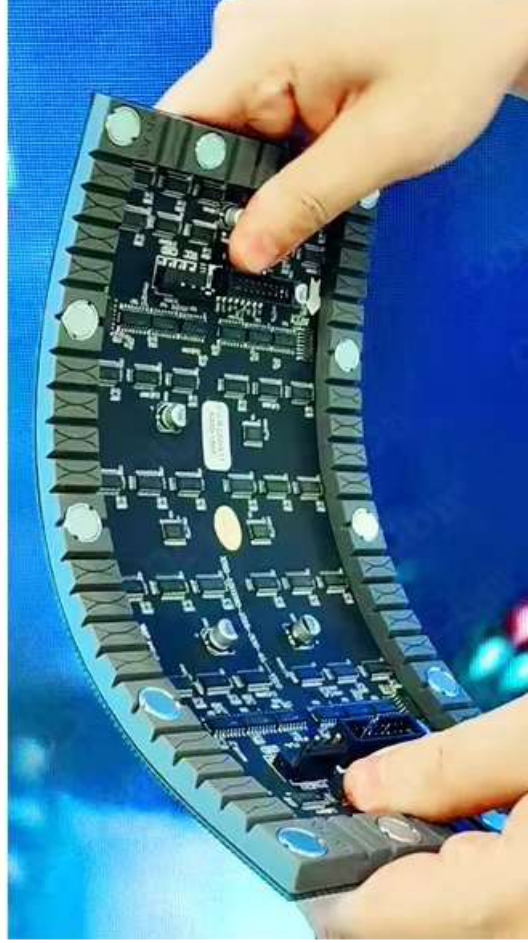

Bize Ulařın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14




İç Mekan Led Ekran

2.50 Serisi

Item	Parameter	Ordinary Standard Configuration
Module Parameter	Product Mode	IFS-EIA2.5S-C
	Pixel Composition	SMD2121
	Pixel Pitch (mm)	2.5
	Module Resolution (W×H)	128×64=8192
	Module Size (mm)	320×160
	Module Weight (kg)	0.45 ± 0.01kg
	Module Input Voltage (V)	4.2-5.0 (Support 5V)
	The Max Current for Module (A)	≤3.1
	The Max Power Consumption for Module (W)	≤15.5 (DC 5V)
Cabinet Parameter	Module Qty/Cabinet (W×H)	2×3
	Cabinet Resolution (W×H)	256×192
	Cabinet Size (mm)	640×480
	Cabinet Area (m²)	0.3072
	Cabinet Weight (kg)	4.1
	Cabinet Pixel Density (dots/m²)	160000
	Cabinet Evenness (mm)	≤0.2
	Maintenance Method	Rear (Front customized)

Item	Parameter	Ordinary Standard Configuration
	Cabinet Material	Die-casting Aluminum
Optical Parameter	White Balance Brightness (nits)	500 - 550
	Visual Angle (Horizontal/Vertical)	140 /140
	Brightness / Colorful Evenness	≥95%
	Contrast Ratio	4000:1
Performance Parameter	Frequency (Hz)	≥50/60
	Driving Method	Constant Current, 1/32 Scanning
	Refresh Ratio (Hz)	3840Hz
	Color Processor	12-14bit
	Lifespan (hrs)	100,000H
	Work/Humidity temperature (°C/RH)	-10°C 40°C / 10%-65%RH (no condensation)
	Storage Temperature/Humidity (°C/RH)	-10°C 30°C / 10%-60%RH (no condensation)

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

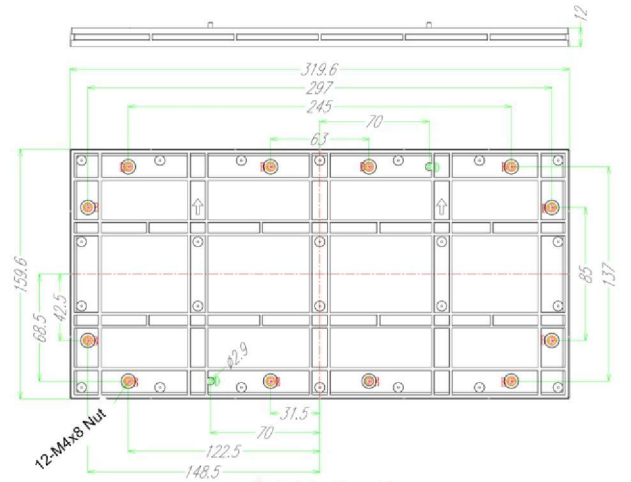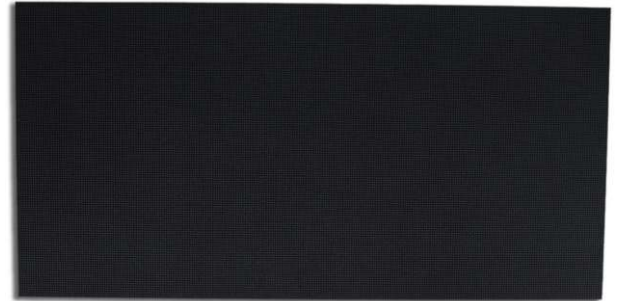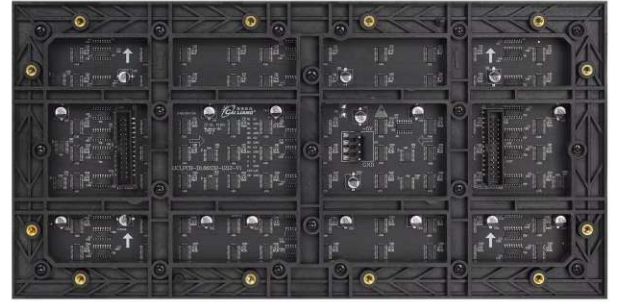


B: Nut Position 12pcs
D: Locating Pin 2pcs

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14

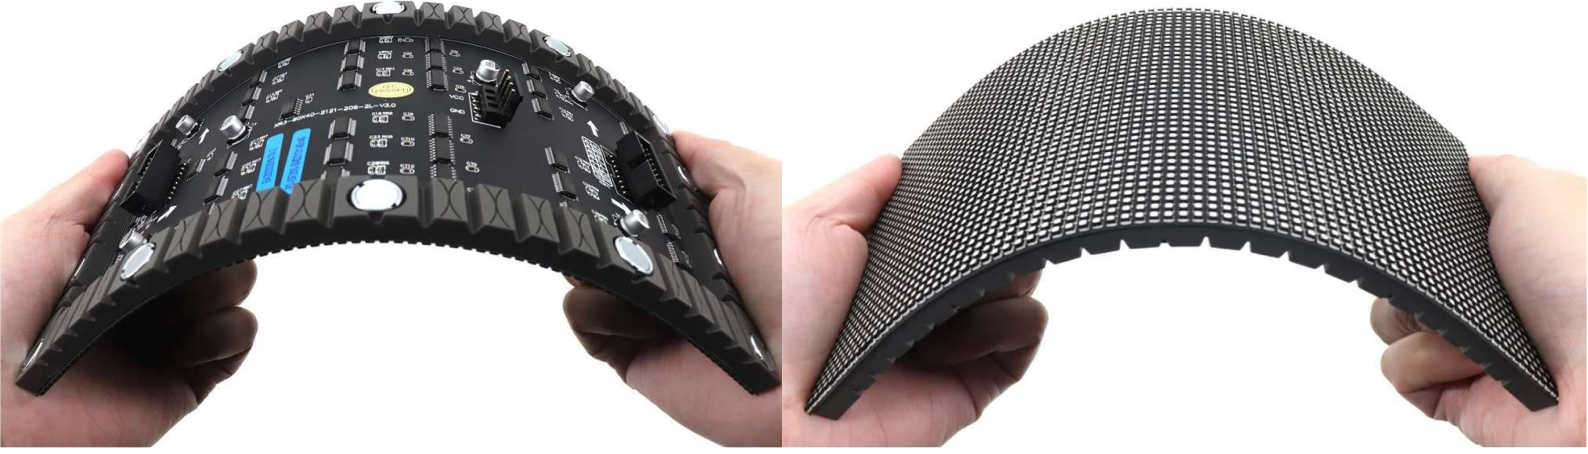

INSTALLATION STEPS

power supply Receiving card



Install the cabinet structure




Install receiving card and power supply




Install led module



The cabinet before assemble



The cabinet after assemble



Effect after installation

İç Mekan Led Ekran

3.076 Serisi

Item	Technical parameter	
Unit module	Product Mode	IFS-EOA3S-C
	Module size	320mm(W)*160mm(H)
	Pixel pitch	3.076mm
	Pixel Density	105625dots//m ²
	LED specification	1616 SMD
	Pixel resolution	104dots(W)*52dots(H)
	Weight	0.43kg±0.02 kg
optical parameter	Best viewing distance	≥3m
	viewing angle	120±10°(H)/120±10°(V)
	Pixel configuration	1R1G1B
	Brightness of while balance	≥5000cd/m ²
Electrical parameter	Working voltage	5V
	Max Power consumption	≤40W
	Driving device	Constant Current driver
	Drive type	1/13 Scanning
	Refresh frequency	≥3840Hz
Main technical parameter	operating environment	Indoor
	Working temperature	-10℃~60℃
	Operation humidity	10%~60%

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

Packing List




Packing List	Qty	Unit
LED Display	1	pcs
User Manual	0	pcs
Approved Certificate	0	pcs
Warranty Card	0	pcs
Construction Notification	0	pcs

Power Supply Configuration solution

Power Supply	Configuration Project
40A Power Supply	Can load 4pcs modules
60A Power Supply	Can load 6pcs modules

Accessories List

Accessories	Name	Picture
Module magnetic suction accessories	Rubber ring	
	Power cable (General specifications: 2.0 square for main line and 0.628 square for branch line)	
	Flat cable (conventional 16p 200mm between modules)	

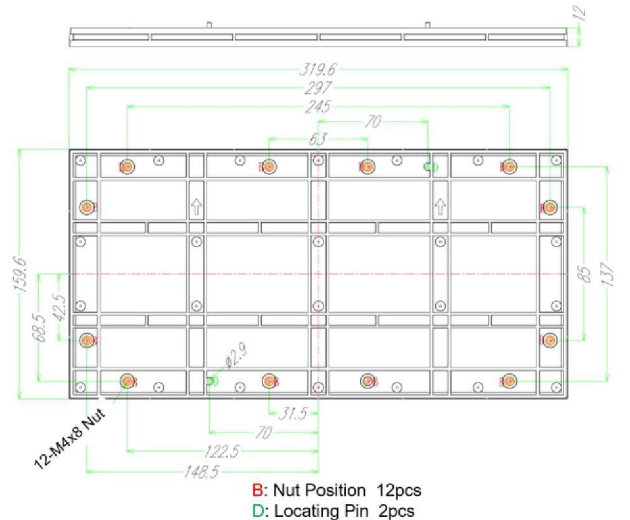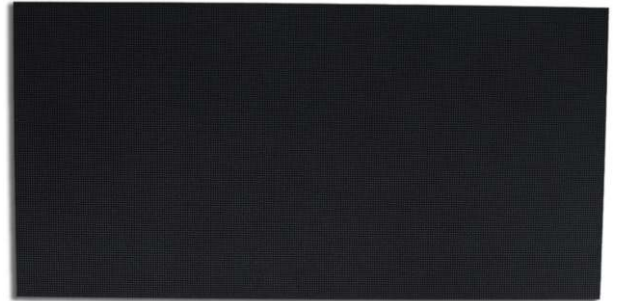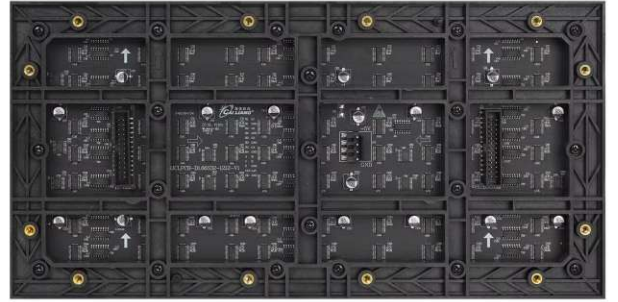

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14



İç Mekan Led Ekran

4.00 Serisi

Item	Technical parameter	
Unit module	Product Mode	IFS-EOA4S-C
	Module size	320mm(W)*160mm(H)
	Pixel pitch	4mm
	Pixel Density	62500dots/m ²
	LED specification	1820 SMD
	Pixel resolution	80dots(W)*40dots(H)
	Weight	0.45kg±0.02 kg
optical parameter	Best viewing distance	≥4m
	Best viewing angle	120±10°(H)/120±10°(V)
	Pixel configuration	1R1G1B
	Brightness of while balance	≥4500cd/m ²
Electrical parameter	Working voltage	5V
	Max Power consumption	≤40W
	Driving device	Constant Current driver
	Drive type	1/10 Scanning
	Refresh frequency	≥3840Hz
Main technical parameter	operating environment	Indoor
	Working temperature	-10℃~60℃
	Operation humidity	10%~60%

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

Packing List




Packing List	Qty	Unit
LED Display	1	pcs
User Manual	0	pcs
Approved Certificate	0	pcs
Warranty Card	0	pcs
Construction Notification	0	pcs

Power Supply Configuration solution

Power Supply	Configuration Project
40A Power Supply	Can load 4pcs modules
60A Power Supply	Can load 6pcs modules

Accessories List


Accessories	Name	Picture
Module magnetic suction accessories	Rubber ring	
	Power cable (General specifications: 2.0 square for main line and 0.628 square for branch line)	
	Flat cable (conventional 16p 200mm between modules)	

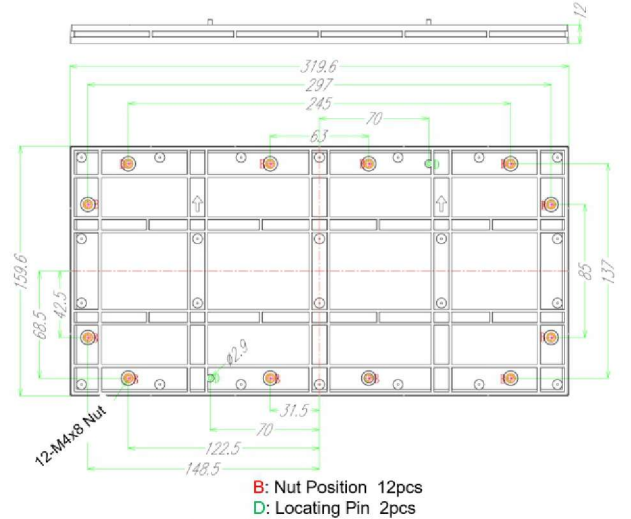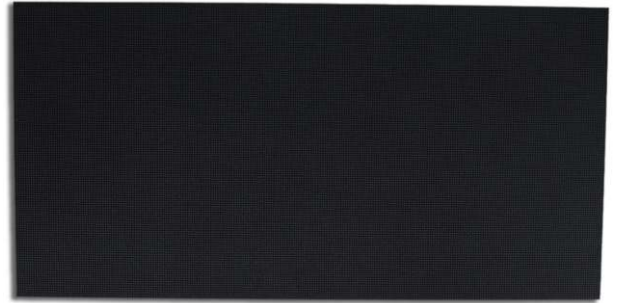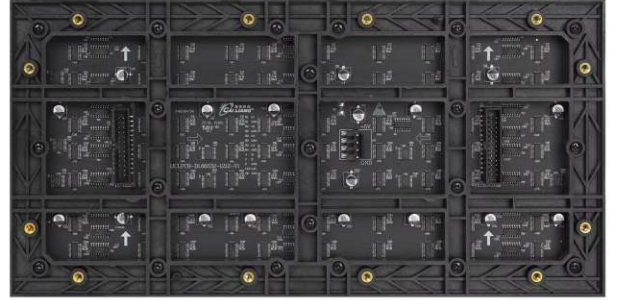

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14

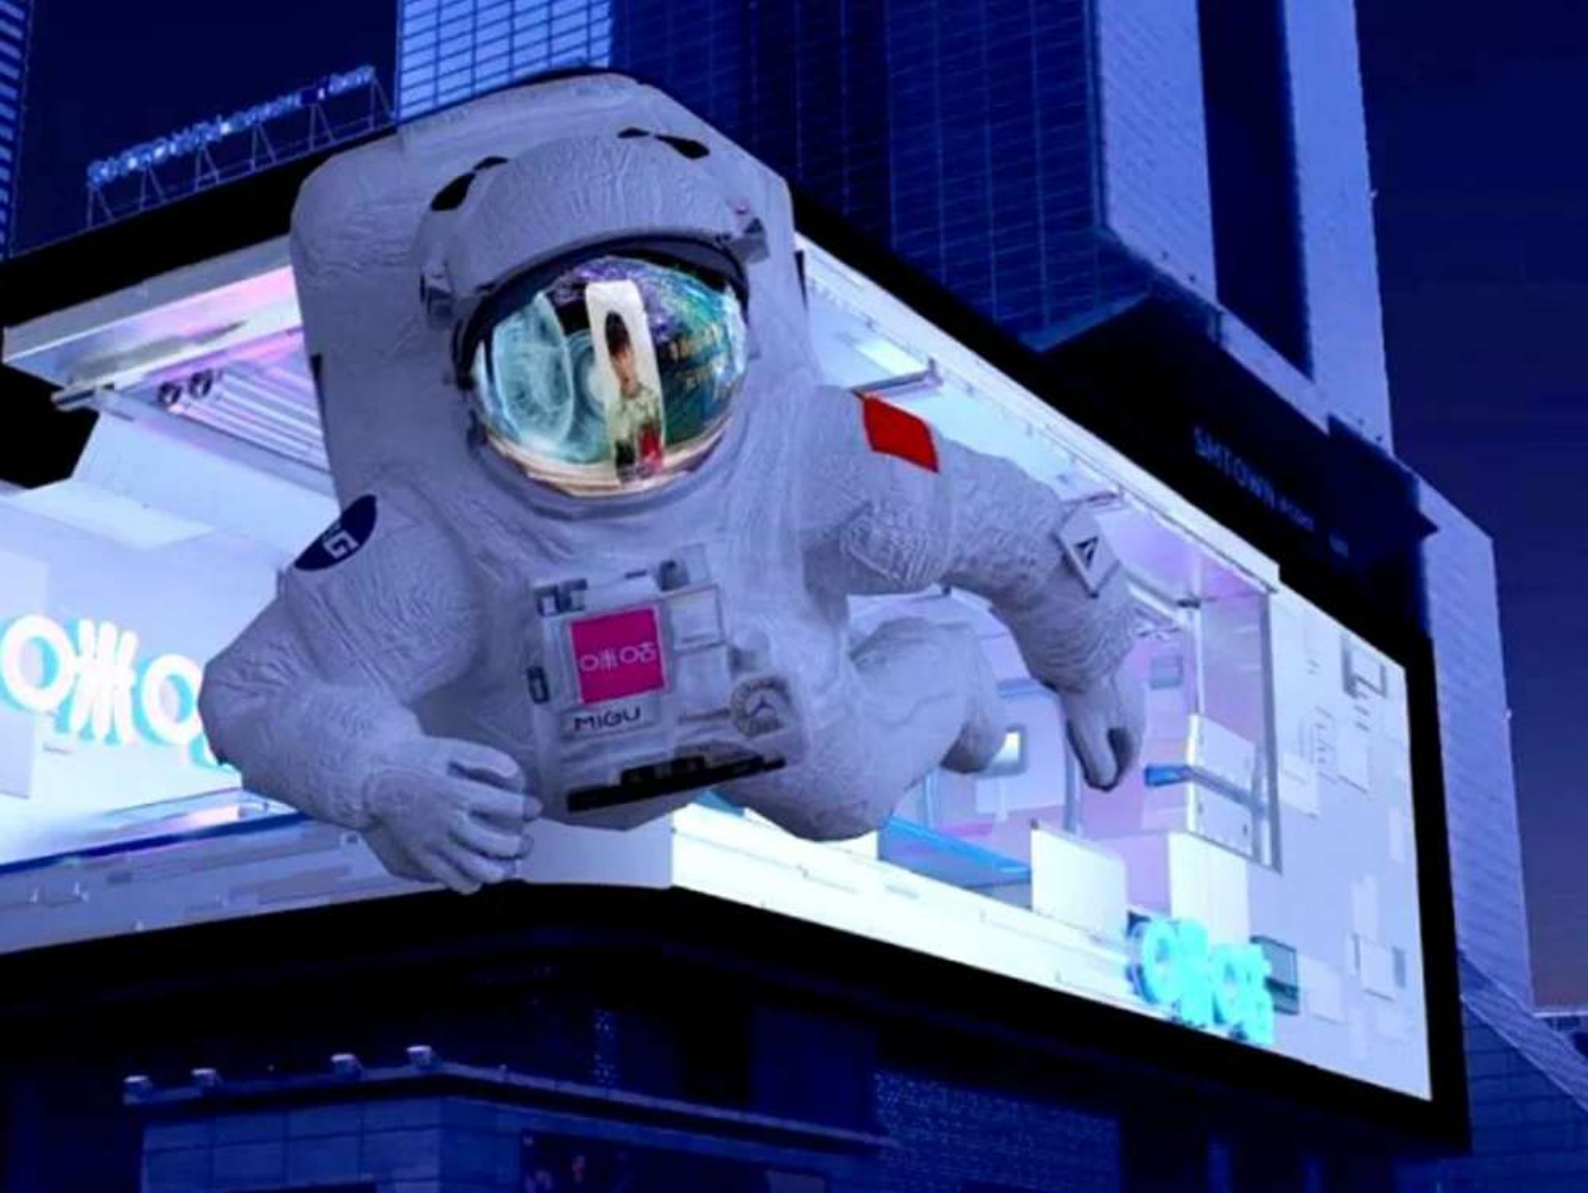

Dış Mekan Led Ekran

2.50 Serisi

Item	Technical parameter	
Unit module	Product Mode	IFS-EOA2.5S-C
	Module size	320mm(W)*160mm(H)
	Pixel pitch	2.5mm
	Pixel Density	160000dots/m ²
	LED specification	1616 SMD
	Pixel resolution	128dots(W)*64dots(H)
	Weight	0.46kg±0.02 kg
optical parameter	Best viewing distance	≥2.5m
	viewing angle	120±10°(H)/120±10°(V)
	Pixel configuration	1R1G1B
	Brightness of while balance	≥5000cd/m ²
Electrical parameter	Working voltage	5V
	Max Power consumption	≤40W
	Driving device	Constant Current driver
	Drive type	1/16 Scanning
	Refresh frequency	≥3840Hz
Main technical parameter	operating environment	Outdoor
	Working temperature	-10℃~60℃
	Operation humidity	10%~60%

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

Packing List




Packing List	Qty	Unit
LED Display	1	pcs
User Manual	0	pcs
Approved Certificate	0	pcs
Warranty Card	0	pcs
Construction Notification	0	pcs

Power Supply Configuration solution

Power Supply	Configuration Project
40A Power Supply	Can load 4pcs modules
60A Power Supply	Can load 6pcs modules

Accessories List

Accessories	Name	Picture
Module magnetic suction accessories	Rubber ring	
	Power cable (General specifications: 2.0 square for main line and 0.628 square for branch line)	
	Flat cable (conventional 16p 200mm between modules)	

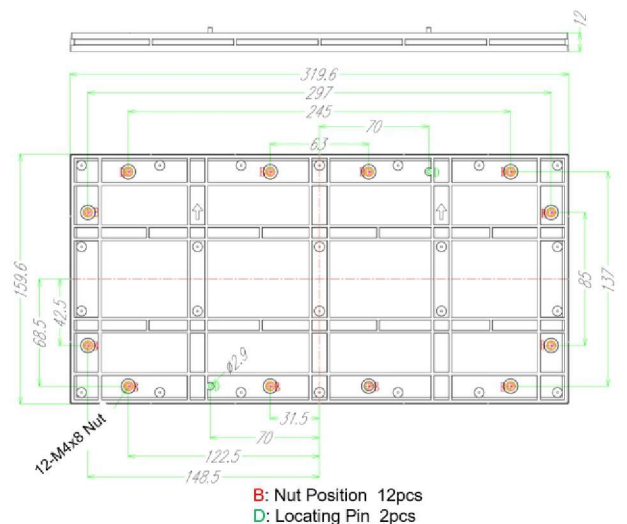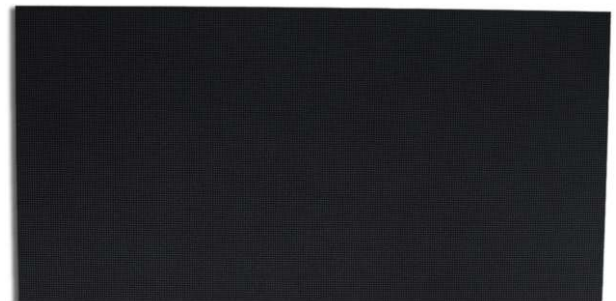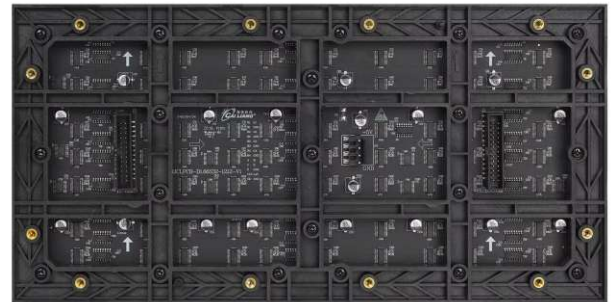

B: Nut Position 12pcs
D: Locating Pin 2pcs

Dış Mekan Led Ekran

3.076 Serisi

Item	Technical parameter	
Unit module	Product Mode	IFS-EOA3S-C
	Module size	320mm(W)*160mm(H)
	Pixel pitch	3.076mm
	Pixel Density	105625dots//m ²
	LED specification	1616 SMD
	Pixel resolution	104dots(W)*52dots(H)
	Weight	0.43kg ± 0.02 kg
optical parameter	Best viewing distance	≥3m
	viewing angle	120±10°(H)/120±10°(V)
	Pixel configuration	1R1G1B
	Brightness of while balance	≥5000cd/m ²
Electrical parameter	Working voltage	5V
	Max Power consumption	≤40W
	Driving device	Constant Current driver
	Drive type	1/13 Scanning
	Refresh frequency	≥3840Hz
Main technical parameter	operating environment	Outdoor
	Working temperature	-10℃~60℃
	Operation humidity	10%~60%

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

Packing List




Packing List	Qty	Unit
LED Display	1	pcs
User Manual	0	pcs
Approved Certificate	0	pcs
Warranty Card	0	pcs
Construction Notification	0	pcs

Power Supply Configuration solution

Power Supply	Configuration Project
40A Power Supply	Can load 4pcs modules
60A Power Supply	Can load 6pcs modules

Accessories List

Accessories	Name	Picture
Module magnetic suction accessories	Rubber ring	
	Power cable (General specifications: 2.0 square for main line and 0.628 square for branch line)	
	Flat cable (conventional 16p 200mm between modules)	

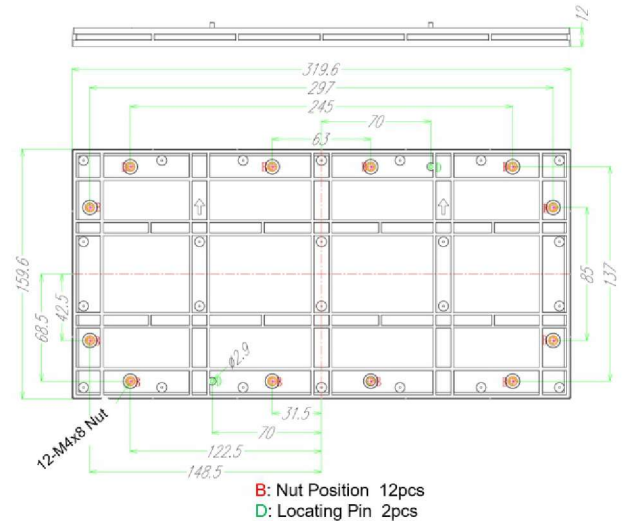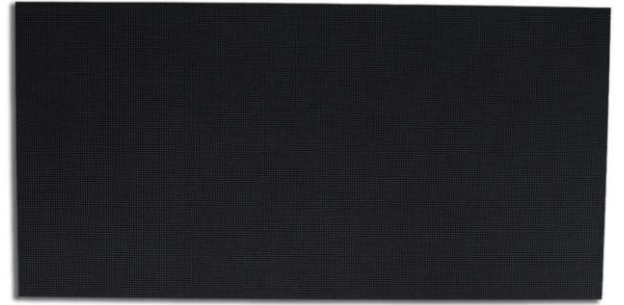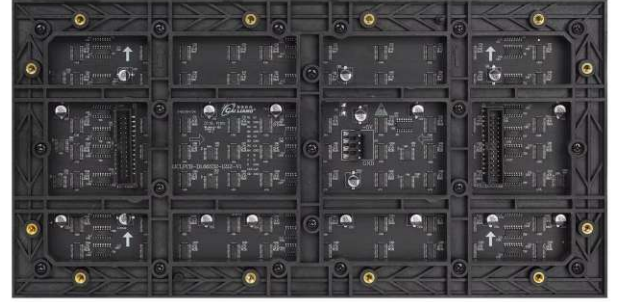

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14

Dış Mekan Led Ekran

4.00 Serisi

Item	Technical parameter	
Unit module	Product Mode	IFS-EOA4S-C
	Module size	320mm(W)*160mm(H)
	Pixel pitch	4mm
	Pixel Density	62500dots/m ²
	LED specification	1820 SMD
	Pixel resolution	80dots(W)*40dots(H)
	Weight	0.45kg±0.02 kg
optical parameter	Best viewing distance	≥4m
	Best viewing angle	120±10°(H)/120±10°(V)
	Pixel configuration	1R1G1B
	Brightness of while balance	≥4500cd/m ²
Electrical parameter	Working voltage	5V
	Max Power consumption	≤40W
	Driving device	Constant Current driver
	Drive type	1/10 Scanning
	Refresh frequency	≥3840Hz
Main technical parameter	operating environment	Outdoor
	Working temperature	-10℃~60℃
	Operation humidity	10%~60%
*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.		

Packing List




Packing List	Qty	Unit
LED Display	1	pcs
User Manual	0	pcs
Approved Certificate	0	pcs
Warranty Card	0	pcs
Construction Notification	0	pcs

Power Supply Configuration solution

Power Supply	Configuration Project
40A Power Supply	Can load 4pcs modules
60A Power Supply	Can load 6pcs modules

Accessories List

Accessories	Name	Picture
Module magnetic suction accessories	Rubber ring	
	Power cable (General specifications: 2.0 square for main line and 0.628 square for branch line)	
	Flat cable (conventional 16p 200mm between modules)	

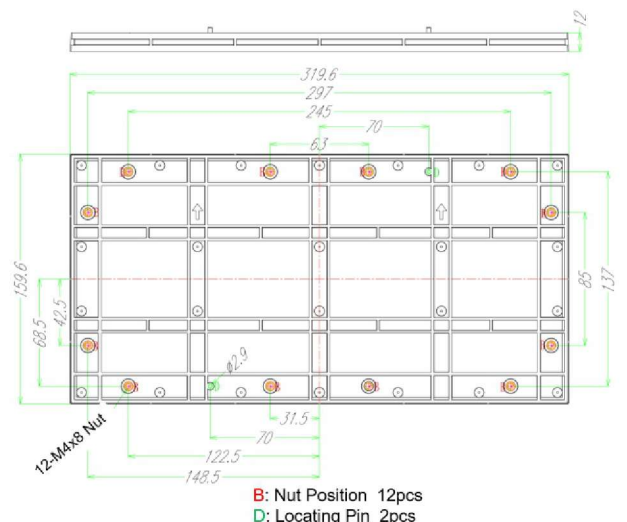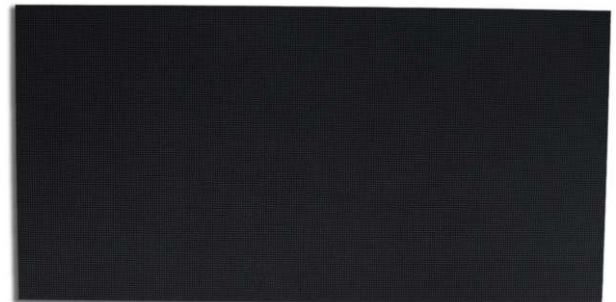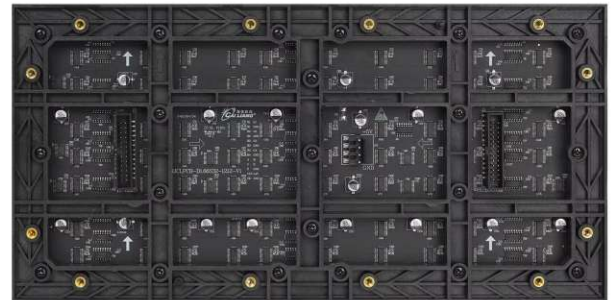

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14



Dış Mekan Led Ekran

5.00 Serisi

Item	Technical parameter	
Unit module	Product Mode	IFS-EOA5S-C
	Module size	320mm(W)*160mm(H)
	Pixel pitch	5mm
	Pixel Density	40000dots/m ²
	LED specification	1820 SMD
	Pixel resolution	64dots(W)*32dots(H)
	Weight	0.44kg±0.02 kg
optical parameter	Best viewing distance	≥5m
	Best viewing angle	120±10°(H)/120±10°(V)
	Pixel configuration	1R1G1B
	Brightness of while balance	≥5000cd/m ²
Electrical parameter	Working voltage	5V
	Max Power consumption	≤40W
	Driving device	Constant Current driver
	Drive type	1/8 Scanning
	Refresh frequency	≥3840Hz
Main technical parameter	operating environment	Outdoor
	Working temperature	-10℃~60℃
	Operation humidity	10%~60%

*We would not provide additional notification if the product information has any update, our company do not take any obligation because of this.

Packing List




Packing List	Qty	Unit
LED Display	1	pcs
User Manual	0	pcs
Approved Certificate	0	pcs
Warranty Card	0	pcs
Construction Notification	0	pcs

Power Supply Configuration solution

Power Supply	Configuration Project
40A Power Supply	Can load 4pcs modules
60A Power Supply	Can load 6pcs modules

Accessories List

Accessories	Name	Picture
Module magnetic suction accessories	Rubber ring	
	Power cable (General specifications: 2.0 square for main line and 0.628 square for branch line)	
	Flat cable (conventional 16p 200mm between modules)	

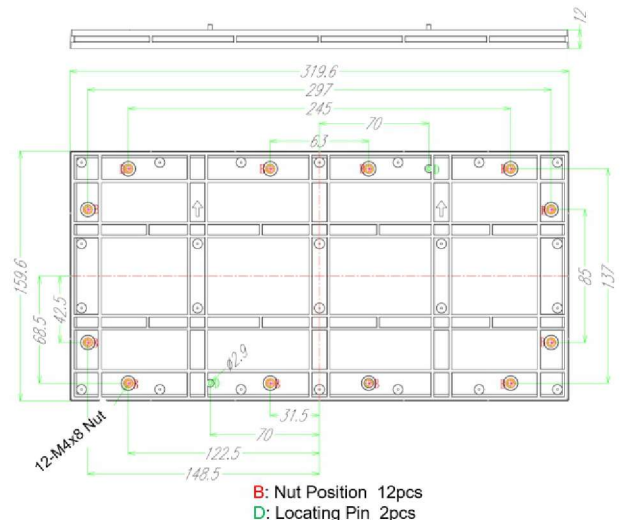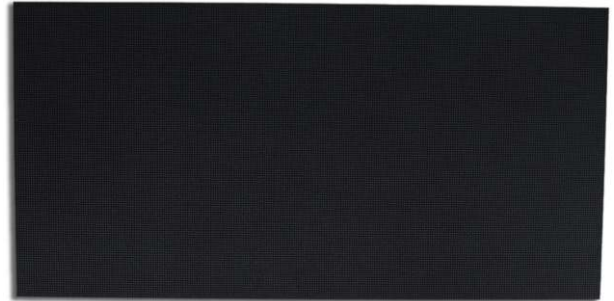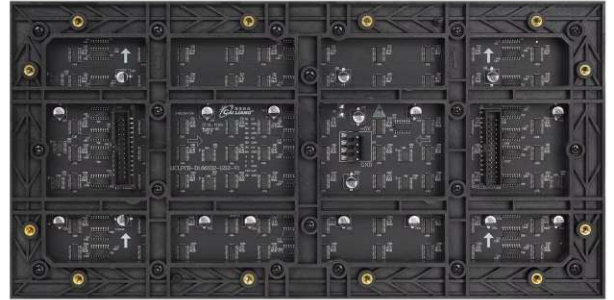

B: Nut Position 12pcs
D: Locating Pin 2pcs

Bize Ulaşın

bilgi@wesareklam.com.tr
wesareklam@hotmail.com

+90 542 609 90 99
+90 532 487 02 14



BELGELERİMİZ



2026

